

**GATE-2014**

**Question Paper**


**&**

**Answer Keys**

# Index

1. Question Paper Analysis
2. Question Paper & Answer keys

# ANALYSIS OF GATE 2014 Civil Engineering

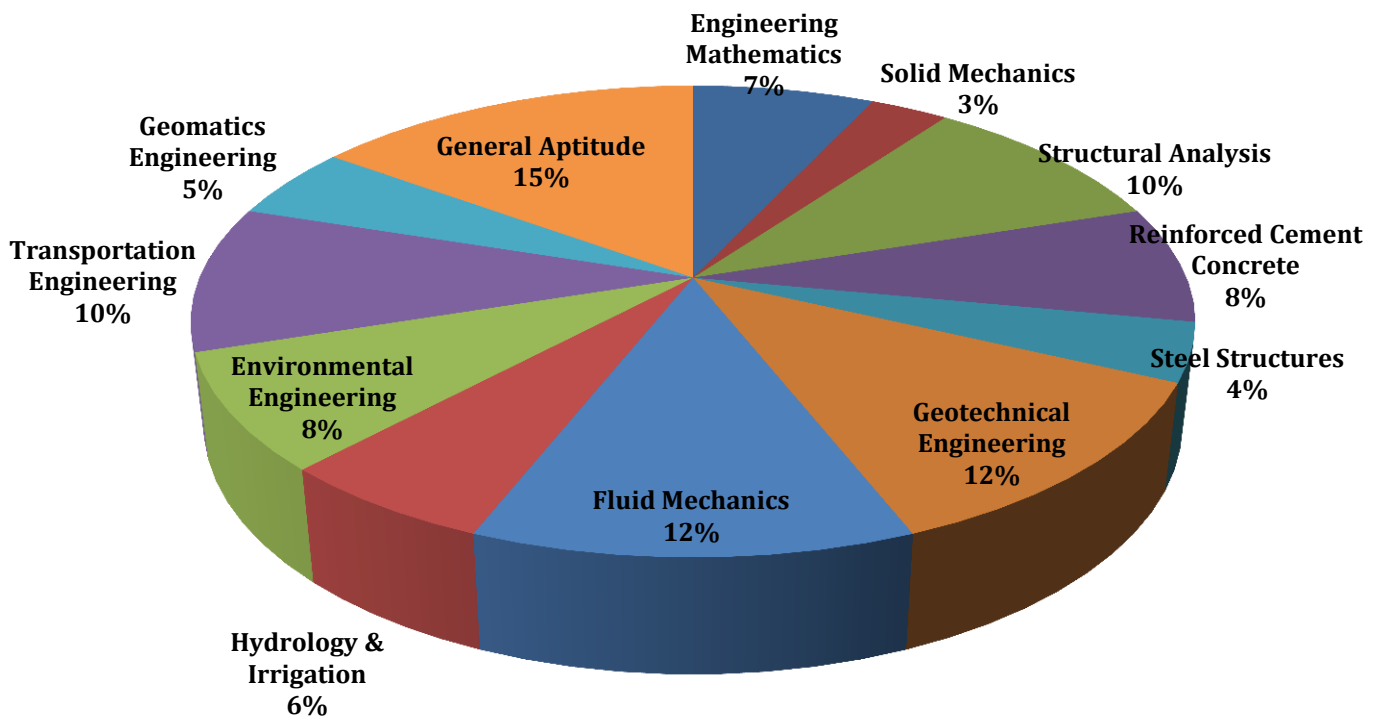

**GATE-2014- CE-Set 1**

SUBJECT	NO OF QUESTION	Topics Asked in Paper	Total Marks
Engineering Mathematics	1M:5 2M:1	Probability and Distribution Calculus Linear Algebra	7
Solid Mechanics	1M:1 2M:1	Simple Bending Theory Flexural and Shear Stresses Shear Centre	3
Structural Analysis	1M:2 2M:4	Trusses and Arches Influence Line Diagram and Rolling Loads Slope and Deflection Method	10
Reinforced Cement Concrete	1M:2 2M:3	Design of RCC Structures Plastic Analysis Analysis of Ultimate Load Capacity	8
Steel Structures	1M:1 2M:2	Plastic Analysis Beams Introduction to Steel Structures	4
Geotechnical Engineering	1M:4 2M:4	Surface Investigations Consolidation Pile Foundation Stability of Slopes Bearing Capacity Index Properties and Soil Classification Consolidation Permeability and Seepage	12
Fluid Mechanics	1M:2 2M:5	Fluid Dynamics Dimensional Analysis Fluid Kinematics Fluid Dynamics Fluid Statics Flow Through Pipes	12
Hydrology & Irrigation	1M:2 2M:2	Hydrology Hydraulics & Hydraulic Machinery Open Channel Flow	6
Environmental Engineering	1M:2 2M:3	Quality Standards of Water Air Pollution and Noise Pollution Water Supply and its Treatment	8
Transportation Engineering	1M:2 2M:4	Design of Rigid Flexible Pavements Geometric Design of Highway Traffic Characteristics Traffic Signs and Signal Design	10
Geomatics Engineering	1M:1 2M:2	Leveling Theodolite & Traversing	5
General Aptitude	1M:5 2M:5	Numerical Ability Verbal Ability	15
<b>Total</b>	<b>65</b>		<b>100</b>

**GATE 2014 Examination**  
**Civil Engineering**

Q.1 – Q.25 carry one mark each

1.  $\lim_{x \rightarrow \infty} \left( \frac{x + \sin x}{x} \right)$  equals to

(A)  $-\infty$  (C) 1  
(B) 0 (D)  $\infty$

[Ans. C]

2. Given the matrices  $J = \begin{bmatrix} 3 & 2 & 1 \\ 2 & 4 & 2 \\ 1 & 2 & 6 \end{bmatrix}$  and  $K = \begin{bmatrix} 1 \\ 2 \\ -1 \end{bmatrix}$ , the product  $K^T J K$  is \_\_\_\_\_

[Ans. \*] (Range 23 to 23)

3. The probability density function of evaporation E on any day during a year in a watershed is given by

$$f(E) = \begin{cases} \frac{1}{5} & 0 \leq E \leq 5 \text{ mm/day} \\ 0 & \text{otherwise} \end{cases}$$

The probability that E lies in between 2 and 4 mm/day in a day in the watershed is (in decimal) \_\_\_\_\_

[Ans. \*] (Range 0.4 to 0.4)

4. The sum of Eigen value of the matrix, [M] is

$$\text{Where } [M] = \begin{bmatrix} 215 & 650 & 795 \\ 655 & 150 & 835 \\ 485 & 355 & 550 \end{bmatrix}$$

(A) 915 (C) 1640  
(B) 1355 (D) 2180

[Ans. A]

5. With reference to the conventional Cartesian (x, y) coordinate system, the vertices of a triangle have the following coordinates:

$(x_1, y_1) = (1, 0)$ ;  $(x_2, y_2) = (2, 2)$ ; and  $(x_3, y_3) = (4, 3)$ . The area of the triangle is equal to

(A)  $\frac{3}{2}$  (C)  $\frac{4}{5}$   
(B)  $\frac{3}{4}$  (D)  $\frac{5}{2}$

[Ans. A]

6. Match the information given in Group - I with those in Group - II.

**Group - I**

P Factor to decrease ultimate strength to design strength

Q Factor to increase working load to ultimate load for design

R Statical method of ultimate load analysis

S Kinematical mechanism method of ultimate load analysis

(A) P - 1; Q - 2; R - 3; S - 4

(B) P - 2; Q - 1; R - 4; S - 3

[Ans. C]

**Group - II**

1 Upper bound on ultimate load

2 Lower bound on ultimate load


3 Material partial safety factor

4 Load factor

(C) P - 3; Q - 4; R - 2; S - 1

(D) P - 4; Q - 3; R - 2; S - 1

7. The possible location of shear centre of the channel section, shown below, is



(A) P


(B) Q

(C) R

(D) S

[Ans. A]

8. The ultimate load (P) in terms of plastic moment  $M_p$  by kinematic approach for a propped cantilever of length L with P acting at its mid-span as shown in the figure, would be

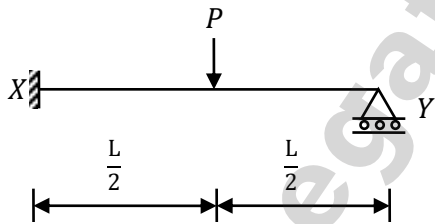

(A)  $P = \frac{2M_p}{L}$

(B)  $P = \frac{4M_p}{L}$

(C)  $P = \frac{6M_p}{L}$

(D)  $P = \frac{8M_p}{L}$

[Ans. C]

9. While designing, for a steel column of Fe250 grade, a base resting on a concrete pedestal of M20 grade, the bearing strength of concrete (in  $N/mm^2$ ) in limit state method of design as per IS : 456 - 2000 is \_\_\_\_\_

[Ans. \*] (Range 9 to 9)

10. A steel section is subjected to a combination of bending actions. The applied shear force is V and the shear capacity of the section is  $V_s$  for such a section, high shear force (as per IS: 800 - 2007) is defined as

(A)  $V > 0.6V_s$


(B)  $V > 0.7V_s$

(C)  $V > 0.8V_s$

(D)  $V > 0.9V_s$


[Ans. A]

11. The degree of static indeterminacy of a rigid joined frame PQR supported as shown in the figure is

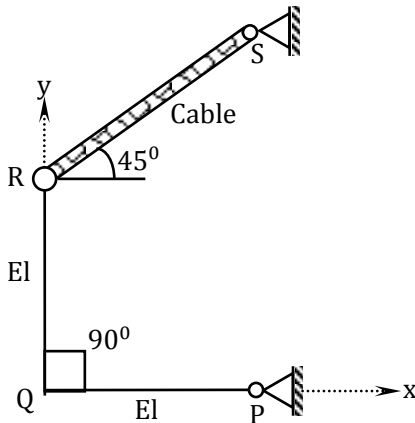

- (A) Zero  
(B) One  
(C) Two  
(D) Unstable  
[Ans. A]

12. In a beam of length  $L$ , four possible influence line diagrams for shear force at a section located at a distance of  $\frac{L}{4}$  from the left end support (marked as P, Q, R and S) are shown below. The correct influence line diagram is

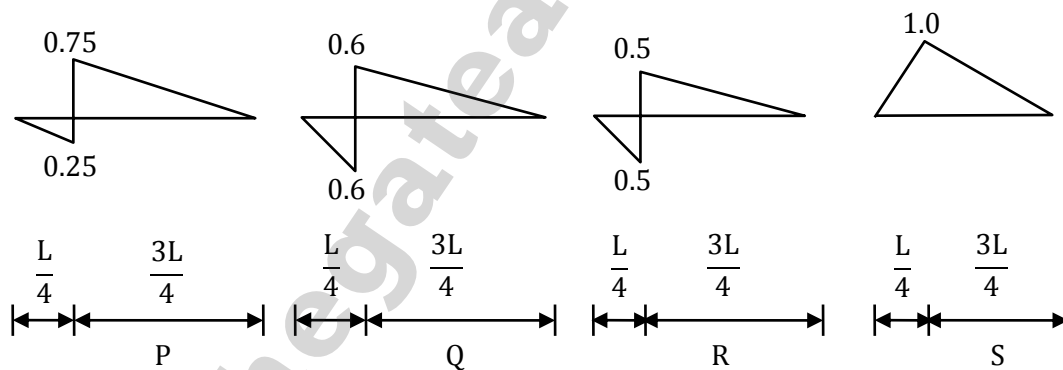

- (A) P  
(B) Q  
(C) R  
(D) S  
[Ans. A]

13. The degree of disturbance of the sample collected by the sampler is expressed by a term called the "area ratio". If the outer diameter and inner diameter of the sampler are  $D_0$  and  $D_i$  respectively, the area ratio is given by

- (A)  $\frac{D_0^2 - D_i^2}{D_i^2}$   
(B)  $\frac{D_i^2 - D_0^2}{D_i^2}$   
(C)  $\frac{D_0^2 - D_i^2}{D_0^2}$   
(D)  $\frac{D_i^2 - D_0^2}{D_0^2}$   
[Ans. A]

14. For a saturated cohesive soil, a triaxial test yields the angle of internal friction ( $\phi$ ) as zero. The conducted test is  
 (A) Consolidated Drained (CD) test (C) Unconfined Compression (UC) test  
 (B) Consolidated Undrained (CU) test (D) Unconsolidated Undrained (UU) test  
**[Ans. D]**
15. The action of negative skin friction on the pile is to  
 (A) increase the ultimate load on the pile (C) maintain the working load on the pile  
 (B) reduce the allowable load on the pile (D) reduce the settlement of the pile  
**[Ans. B]**
16. A long slope is formed in a soil with shear strength parameters:  $c' = 0$  and  $\phi' = 34^\circ$ . A firm stratum lies below the slope and it is assumed that the water table may occasionally rise to the surface, with seepage taking place parallel to the slope. Use  $\gamma_{\text{sat}} = 18 \text{ kN/m}^3$  and  $\gamma_w = 10 \text{ kN/m}^3$ . The maximum slope angle (in degrees) to ensure a factor of safety of 1.5, assuming a potential failure surface parallel to the slope, would be  
 (A) 45.3 (C) 12.3  
 (B) 44.7 (D) 11.3  
**[Ans. D]**
17. An incompressible homogeneous fluid is flowing steadily in a variable diameter pipe having the large and small diameters as 15 cm and 5 cm, respectively. If the velocity at a section at the 15 cm diameter portion of the pipe is 2.5 m/s, the velocity of the fluid (in m/s) at a section falling in 5 cm portion of the pipe is \_\_\_\_\_  
**[Ans. \*] (Range 22 to 23)**
18. A conventional flow duration curve is a plot between  
 (A) Flow and percentage time flow is exceeded  
 (B) Duration of flooding and ground level elevation  
 (C) Duration of water supply in a city and proportion of area receiving supply exceeding this duration  
 (D) Flow rate and duration of time taken to empty a reservoir at that flow rate  
**[Ans. A]**
19. In reservoirs with an uncontrolled spillway, the peak of the plotted outflow hydrograph  
 (A) lies outside the plotted inflow hydrograph  
 (B) lies on the recession limb of the plotted inflow hydrograph  
 (C) lies on the peak of the inflow hydrograph  
 (D) is higher than the peak of the plotted inflow hydrograph  
**[Ans. B]**
20. The dimension for kinematic viscosity is  
 (A)  $\frac{L}{MT}$  (C)  $\frac{L^2}{T}$   
 (B)  $\frac{L}{T^2}$  (D)  $\frac{ML}{T}$   
**[Ans. C]**




21. Some of the nontoxic metals normally found in natural water are  
 (A) arsenic, lead and mercury (C) cadmium, chromium and copper  
 (B) calcium, sodium and silver (D) iron, manganese and magnesium  
**[Ans. D]**
22. The amount of CO<sub>2</sub> generated (in kg) while completely oxidizing one kg of CH<sub>4</sub> to the end products is \_\_\_\_\_  
**[Ans. \*] (Range 2.7 to 2.8)**
23. The minimum value of 15 minute peak hour factor on a section of a road is  
 (A) 0.10 (C) 0.25  
 (B) 0.20 (D) 0.33  
**[Ans. C]**
24. The following statements are related to temperature stresses developed in concrete pavement slabs with free edges (without any restraint):  
 P. The temperature stresses will be zero during both day and night times if the pavement slab is considered weightless  
 Q. The temperature stresses will be compressive at the bottom of the slab during night time if the self-weight of the pavement slab is considered  
 R. The temperature stresses will be compressive at the bottom of the slab during day time if the self-weight of the pavement slab is considered  
 The TRUE statement(s) is(are)  
 (A) P only (C) P and Q only  
 (B) Q only (D) P and R only  
**[Ans. C]**
25. The Reduced Levels (RLs) of the points P and Q are +49.600 m and +51.870 m respectively. Distance PQ is 20 m. The distance (in m from P) at which the +51.000 m contour cuts the line PQ is  
 (A) 15.00 (C) 3.52  
 (B) 12.33 (D) 2.27  
**[Ans. B]**

**Q.26 – Q.55 carry two marks each**

26. If the following equation establishes equilibrium in slightly bent position, the mid – span deflection of a member shown in the figure is

$$\frac{d^2y}{dx^2} + \frac{P}{EI}y = 0$$

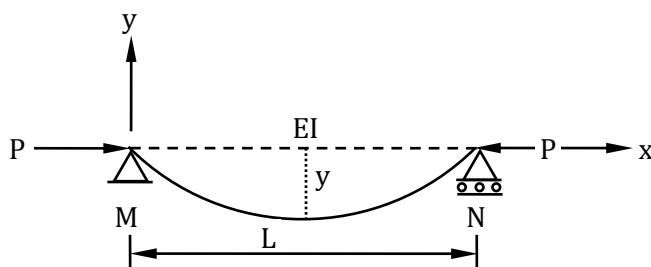

If  $a$  is amplitude constant for  $y$ , then

(A)  $y = \frac{1}{p} \left( 1 - a \cos \frac{2\pi x}{L} \right)$


(C)  $y = a \sin \frac{n\pi x}{L}$

(B)  $y = \frac{1}{p} \left( 1 - a \sin \frac{2\pi x}{L} \right)$

(D)  $y = a \cos \frac{n\pi x}{L}$

[Ans. C]

27. A box of weight 100 kN shown in the figure is to be lifted without swinging. If all forces are coplanar, the magnitude and direction ( $\theta$ ) of the force ( $F$ ) with respect to  $x$  - axis should be

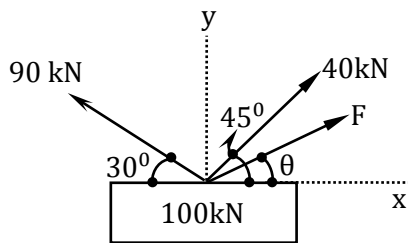

(A)  $F = 56.389 \text{ kN}$  and  $\theta = 28.28^\circ$

(C)  $F = 9.055 \text{ kN}$  and  $\theta = 1.414^\circ$

(B)  $F = -56.389 \text{ kN}$  and  $\theta = -28.28^\circ$

(D)  $F = -9.055 \text{ kN}$  and  $\theta = -1.414^\circ$

[Ans. A]


28. A particle moves along a curve whose parametric equation are  $x = t^3 + 2t$ ,  $y = -3e^{-2t}$  and  $z = 2 \sin(5t)$ , where  $x$ ,  $y$  and  $z$  show variations of the distance covered by the particle (in cm) with time  $t$  (in s). the magnitude of the acceleration of the particle (in  $\text{cm/s}^2$ ) at  $t = 0$  is \_\_\_\_\_

[Ans. \*] Range 12 to 12

29. A traffic office imposes on an average 5 number of penalties daily on traffic violators. Assume that the number of penalties on different days is independent and follows a poisson distribution. The probability that there will be less than 4 penalties in a day is \_\_\_\_.

[Ans. \*] Range 0.26 to 0.27

30. Mathematical idealization of a crane has three bars with their vertices arranged as shown in the figure with a load of 80 kN hanging vertically. The coordinates of the vertices are given in parentheses. The force in the member QR,  $F_{QR}$  will be

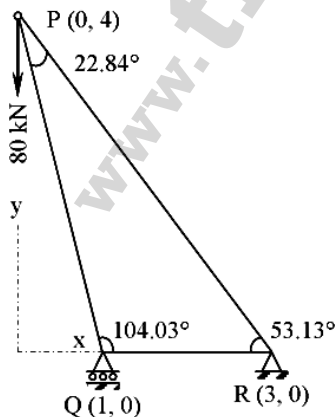

(A) 30 kN Compressive


(C) 50 kN Compressive

(B) 30 kN Tensile

(D) 50 kN Tensile


[Ans. A]

31. For the cantilever beam of span 3 m (shown below), a concentrated load of 20 kN applied at the free end causes a vertical displacement of 2 mm at a section located at a distance of 1 m from the fixed end. If a concentrated vertically downward load of 10 kN is applied at the section located at a distance of 1 m from the fixed end (with no other load on the beam), the maximum vertical displacement in the same beam (in mm) is \_\_\_\_\_

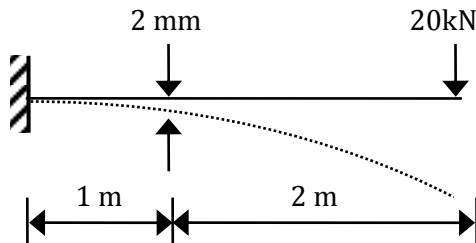

[Ans. \*] Range 1 to 1

32. For the truss shown below, the member PQ is short by 3 mm. the magnitude of vertical displacement of joint R (in mm) is \_\_\_\_\_

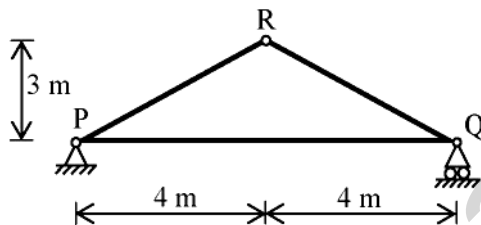


[Ans. \*] Range 1.0 to 2.5

33. A rectangular beam of width (b) 230 mm and effective depth (d) 450 mm is reinforced with four bars of 12 mm diameter. The grade of concrete is M20 and grade of steel is Fe500. Given that for M20 grade of concrete the ultimate shear strength,  $\tau_{uc} = 0.36 \text{ N/mm}^2$  for steel percentage,  $p = 0.25$ , and  $\tau_{uc} = 0.48 \text{ N/mm}^2$  for  $p = 0.50$ . For a factored shear force of 45 kN, the diameter (in mm) of Fe500 steel two legged stirrups to be used at spacing of 375 mm, should be

- (A) 8 (C) 12  
(B) 10 (D) 16

[Ans. A]

34. The tension and shear force (both in kN) in each bolt of the joint, as shown below, respectively are

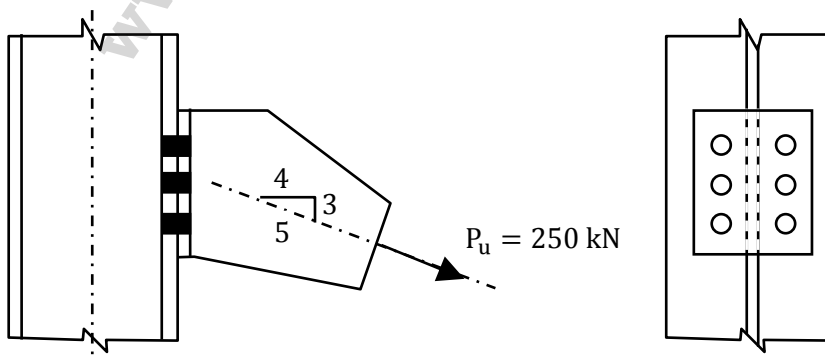

- (A) 30.33 and 20.00 (C) 33.33 and 20.00  
(B) 30.33 and 25.00 (D) 33.33 and 25.00

[Ans. D]

35. For a beam of cross-section, width = 230 mm and effective depth = 500 mm, the number of rebars of 12 mm diameter required to satisfy minimum tension reinforcement requirement specified by IS:456-2000 (assuming grade of steel reinforcement as Fe500) is \_\_\_\_\_


[Ans. \*] Range 2 to 2

36. In a reinforced concrete section, the stress at the extreme fibre in compression is 5.80 MPa. The depth of neutral axis in the section is 58 mm and the grade of concrete is M25. Assuming linear elastic behavior of the concrete, the effective curvature of the section (in per mm) is

- (A)  $2.0 \times 10^{-6}$  (C)  $4.0 \times 10^{-6}$   
(B)  $3.0 \times 10^{-6}$  (D)  $5.0 \times 10^{-6}$

[Ans. C]

37. Group I contains representative load-settlement curves for different modes of bearing capacity failures of sandy soil. Group II enlists the various failure characteristics. Match the load-settlement curves with the corresponding failure characteristics.



- | Group I    | Group II   |
|------------|--|
| P. Curve J | 1. No apparent heaving of soil around the footing      |
| Q. Curve K | 2. Rankine's passive zone develops imperfectly         |
| R. Curve L | 3. well defined slip surface extends to ground surface |

- (A) P - 1, Q - 3, R - 2 (C) P - 3, Q - 1, R - 2  
(B) P - 3, Q - 2, R - 1 (D) P - 1, Q - 2, R - 3

[Ans. A]

38. A given cohesionless soil has  $e_{\max} = 0.85$  and  $e_{\min} = 0.50$ . In the field, the soil is compacted to a mass density of  $1800 \text{ kg/m}^3$  at a water content of 8%. Take the mass density of water as  $1000 \text{ kg/m}^3$  and  $G_s$  as 2.7. The relative density (in %) of the soil is

- (A) 56.43 (C) 62.87  
(B) 60.25 (D) 65.71

[Ans. D]


39. The following data are given for the laboratory sample.

$$\sigma'_0 = 175 \text{ kPa}; e_0 = 1.1; \sigma'_0 + \Delta \sigma'_0 = 300 \text{ kPa}; e = 0.9$$

If thickness of the clay specimen is 25 mm, the value of coefficient of volume compressibility is \_\_\_\_\_  $\times 10^{-4} \text{ m}^2/\text{kN}$

[Ans. \*] Range 7.6 to 8.0

40. The flow net constructed for the dam is shown in the figure below. Taking the coefficient of permeability as  $3.8 \times 10^{-6} \text{ m/s}$ , the quantity of flow (in  $\text{cm}^3/\text{s}$ ) under the dam per meter of dam is \_\_\_\_\_

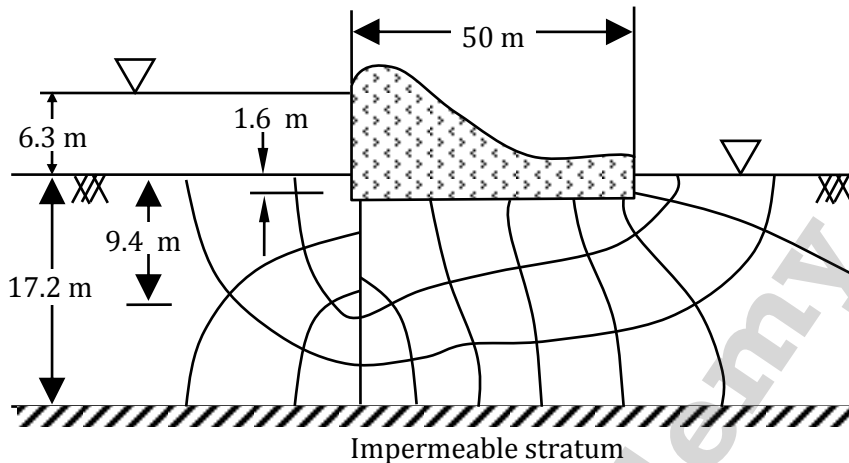


[Ans. \*] Range 7.10 to 7.85

41. A horizontal jet of water with its cross-sectional area of  $0.0028 \text{ m}^2$  hits a fixed vertical plate with a velocity of  $5 \text{ m/s}$ . After impact the jet splits symmetrically in a plane parallel to the plane of the plate. The force of impact (in N) of the jet on the plate is  
 (A) 90 (C) 70  
 (B) 80 (D) 60  
 [Ans. C]

42. A venturimeter, having a diameter of  $7.5 \text{ cm}$  at the throat and  $15 \text{ cm}$  at the enlarged end, is installed in a horizontal pipeline of  $15 \text{ cm}$  diameter. The pipe carries an incompressible fluid at a steady rate of  $30 \text{ litres per second}$ . The difference of pressure head measured in terms of the moving fluid in between the enlarged and the throat of the venturimeter is observed to be  $2.45 \text{ m}$ . Taking the acceleration due to gravity as  $9.81 \text{ m/s}^2$ , the coefficient of discharge of the venturimeter (correct up to two places of decimal) is \_\_\_\_\_  
 [Ans. \*] Range 0.93 to 0.96

43. A rectangular channel having a bed slope of  $0.0001$ , width  $3.0 \text{ m}$  and Manning's coefficient 'n'  $0.015$ , carries a discharge of  $1.0 \text{ m}^3/\text{s}$ . Given that the normal depth of flow ranges between  $0.76 \text{ m}$  and  $0.8 \text{ m}$ . The minimum width of a throat (in m) that is possible at a given section, while ensuring that the prevailing normal depth is not exceeded along the reach upstream of the contraction, is approximately equal to (assume negligible losses)  
 (A) 0.64 (C) 1.04  
 (B) 0.84 (D) 1.24  
 [Ans. B]

44. Three rigid buckets, shown as in the figures (1), (2) and (3), are of identical heights and base areas. Further, assume that each of these buckets have negligible mass and are full of water. The weights of water in these buckets are denoted as  $W_1$ ,  $W_2$ , and  $W_3$  respectively. Also, let the force of water on the base of the bucket be denoted as  $F_1$ ,  $F_2$ , and  $F_3$  respectively. The option giving an accurate description of the system physics is

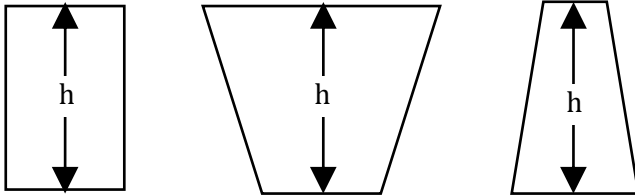

ALL THREE BUCKETS HAVE THE SAME BASE AREA

- |   |   |   |   |
|---|---|---|---|
| 1   | 2 | 3 |   |
| (A) $W_2 = W_1 = W_3$ and $F_2 > F_1 > F_3$ |   |   | (C) $W_2 = W_1 = W_3$ and $F_1 = F_2 = F_3$ |
| (B) $W_2 > W_1 > W_3$ and $F_2 > F_1 > F_3$ |   |   | (D) $W_2 > W_1 > W_3$ and $F_1 = F_2 = F_3$ |

**[Ans. D]**

45. An incompressible fluid is flowing at a steady rate in a horizontal pipe. From a section, the pipe divides into two horizontal parallel pipes of diameters  $d_1$  and  $d_2$  (where  $d_1 = 4d_2$ ) that run for a distance of  $L$  each and then again join back to a pipe of the original size. For both the parallel pipes, assume the head loss due to friction only and the Darcy–Weisbach friction factor to be the same. The velocity ratio between the bigger and the smaller branched pipes is

**[Ans. \*] Range 2 to 2**

46. 16 MLD of water is flowing through a 2.5 km long pipe of diameter 45 cm. The chlorine at the rate of 32 kg/d is applied at the entry of this pipe so that disinfected water is obtained at the exit. There is a proposal to increase the flow through this pipe to 22 MLD from 16 MLD. Assume the dilution coefficient,  $n = 1$ . The minimum amount of chlorine (in kg per day) to be applied to achieve the same degree of disinfection for the enhanced flow is

- |           |           |
|-----------|-----------|
| (A) 60.50 | (C) 38.00 |
| (B) 44.00 | (D) 23.27 |

**[Ans. A]**

47. The potable water is prepared from turbid surface water by adopting the following treatment sequence.

- (A) Turbid surface water → Coagulation → Flocculation → Sedimentation → Filtration → Disinfection → Storage & Supply
- (B) Turbid surface water → Disinfection → Flocculation → Sedimentation → Filtration → Coagulation → Storage & Supply
- (C) Turbid surface water → Filtration → Sedimentation → Disinfection → Flocculation → Coagulation → Storage & Supply
- (D) Turbid surface water → Sedimentation → Flocculation → Coagulation → Disinfection → Filtration → Storage & Supply

**[Ans. A]**

48. For a sample of water with the ionic composition shown in the figure below, the carbonate and non-carbonate hardness concentrations (in mg/l  $\text{CaCO}_3$ ), respectively are:

meq/l	0	4	5	7
	$\text{Ca}^{2+}$		$\text{Mg}^{2+}$	$\text{Na}^+$
	$\text{HCO}_3^-$		$\text{SO}_4^{2-}$	
meq/l	0	3.5	7	

- (A) 200 and 50 (C) 75 and 175  
 (B) 175 and 75 (D) 50 and 200  
**[Ans. B]**

49. A straight 100 m long raw water gravity main is to carry water from an intake structure to the jack well of a water treatment plant. The required flow through this water main is  $0.21 \text{ m}^3/\text{s}$ . Allowable velocity through the main is 0.75 m/s. Assume  $f = 0.01, g = 9.81 \text{ m/s}^2$ . The minimum gradient (in cm/100 m length) to be given to this gravity main so that the required amount of water flows without any difficulty is \_\_\_\_\_

**[Ans. \*] Range 4.7 to 4.9**

50. A traffic survey conducted on a road yield an average daily traffic count of 5000 vehicles. The axle load distribution on the same road is given in the following table:

Axle load (tonnes)	Frequency of traffic (%)
18	10
14	20
10	35
8	15
6	20

The design period of the road is 15 years, the yearly traffic growth rate is 7.5% and the load safety factor (LSF) is 1.3. if the vehicle damage factor (VDF) is calculated from the above data, the design traffic (in million stand axle load, MSA) is \_\_\_\_\_

**[Ans. \*] Range 307 to 310**

51. The perception-reaction time for a vehicle travelling at 90 km/h, given the coefficient of longitudinal friction of 0.35 and the stopping sight distance of 170 m (assume  $g = 9.81 \text{ m/s}^2$ ), is \_\_\_\_\_ seconds.

**[Ans. \*] Range 3.1 to 3.2**

52. The speed-density ( $u-k$ ) relationship on a single lane road with unidirectional flow is  $u = 70 - 0.7k$ , where  $u$  is in km/hr and  $k$  is in veh/km. The capacity of the road (in veh/hr) is \_\_\_\_\_

**[Ans. \*] Range 1750 to 1750**

53. An isolated three-phase traffic signal is designed by Webster's method. The critical flow ratios for three phases are 0.20, 0.30, and 0.25 respectively, and lost time per phase is 4 seconds. The optimum cycle length (in seconds) is \_\_\_\_\_

**[Ans. \*] Range 90 to 95**

54. A levelling is carried out to establish the Reduced Levels (RL) of point R with respect to the Bench Mark (BM) at P. The staff readings taken are given below.

Staff Station	BS	IS	FS	RL
P	1.655 m			100.00 m
Q	-0.950 m		-1.500 m	
R			0.750 m	?

If RL of P is + 100.00 m, then RL (in m) of R is

- (A) 103.355 (C) 101.455  
(B) 103.155 (D) 100.355
55. Group I lists tool/instrument while Group II lists the method of surveying. Match the tool/instrument with the corresponding method of surveying.

Group I	Group II
P. Alidade	1. Chain surveying
Q. Arrow	2. Levelling
R. Bubble tube	3. Plain table surveying
S. Stadia hair	4. Theodolite surveying

- (A) P - 3; Q - 2; R - 1; S - 4 (C) P - 1; Q - 2; R - 4; S - 3  
(B) P - 2; Q - 4; R - 3; S - 1 (D) P - 3; Q - 1; R - 2; S - 4

[Ans. D]

**Q. 56 – Q. 60 carries one mark each**

56. A student is required to demonstrate a high level of comprehension of the subject, especially in the social sciences.

The word closest in meaning to comprehension is

- (A) understanding (C) concentration  
(B) meaning (D) stability

[Ans. A]

57. Choose the most appropriate word from the options given below to complete the following sentence.

One of his biggest \_\_\_\_\_ was his ability to forgive.

- (A) vice (C) choices  
(B) virtues (D) strength

[Ans. B]

58. Rajan was not happy that Sajan decided to do the project on his own. On observing his unhappiness, Sajan explained to Rajan that he preferred to work independently.

Which one of the statements below is logically valid and can be inferred from the above sentences?

- (A) Rajan has decided to work only in a group.  
(B) Rajan and Sajan were formed into a group against their wishes.  
(C) Sajan had decided to give in to Rajan's request to work with him.  
(D) Rajan had believed that Sajan and he would be working together.

[Ans. D]



59. If  $y = 5x^2 + 3$ , then the tangent at  $x = 0, y = 3$   
 (A) passes through  $x = 0, y = 0$  (C) is parallel to the x-axis  
 (B) has a slope of +1 (D) has a slope of  $-1$

[Ans. C]

60. A foundry has a fixed daily cost of Rs 50,000 whenever it operates and a variable cost of Rs 800Q, where Q is the daily production in tonnes. What is the cost of production in Rs per tonne for a daily production of 100 tonnes?

[Ans. \*] Range 1300 to 1300

**Q. 61 – Q. 65 carry two marks each.**

61. Find the odd one in the following group: ALRVX, EPVZB, ITZDF, OYEIK  
 (A) ALRVX (C) ITZDF  
 (B) EPVZB (D) OYEIK

[Ans. D]

62. Anuj, Bhola, Chandan, Dilip, Eswar and Faisal live on different floors in a six-storeyed building (the ground floor is numbered 1, the floor above it 2, and so on). Anuj lives on an even-numbered floor. Bhola does not live on an odd numbered floor. Chandan does not live on any of the floors below Faisal's floor. Dilip does not live on floor number 2. Eswar does not live on a floor immediately above or immediately below Bhola. Faisal lives three floors above Dilip. Which of the following floor-person combinations is correct?

	Anuj	Bhola	Chandan	Dilip	Eswar	Faisal
(A)	6	2	5	1	3	4
(B)	2	6	5	1	3	4
(C)	4	2	6	3	1	5
(D)	2	4	6	1	3	5

[Ans. B]

63. The smallest angle of a triangle is equal to two thirds of the smallest angle of a quadrilateral. The ratio between the angles of the quadrilateral is 3:4:5:6. The largest angle of the triangle is twice its smallest angle. What is the sum, in degrees, of the second largest angle of the triangle and the largest angle of the quadrilateral?


[Ans. \*] Range 180 to 180

64. One percent of the people of country X are taller than 6 ft. Two percent of the people of country Y are taller than 6 ft. There are thrice as many people in country X as in country Y. Taking both countries together, what is the percentage of people taller than 6 ft?

- (A) 3.0 (C) 1.5  
 (B) 2.5 (D) 1.25

[Ans. D]

65. The monthly rainfall chart based on 50 years of rainfall in Agra is shown in the following figure. Which of the following are true? (k percentile is the value such that k percent of the data fall below that value)

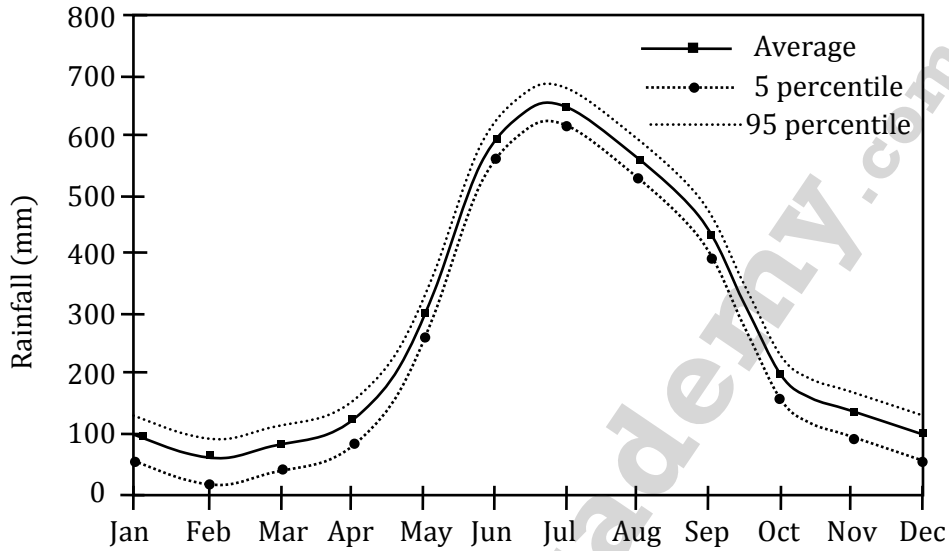

- (i) On average, it rains more in July than in December  
(ii) Every year, the amount of rainfall in August is more than that in January  
(iii) July rainfall can be estimated with better confidence than February rainfall  
(iv) In August, there is atleast 500 mm of rainfall
- (A) (i) and (ii) (C) (ii) and (iii)  
(B) (i) and (iii) (D) (iii) and (iv)

[Ans. B]